


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1		RELEASED FOR PRODUCTION.	10/4/2016	SM	JAG

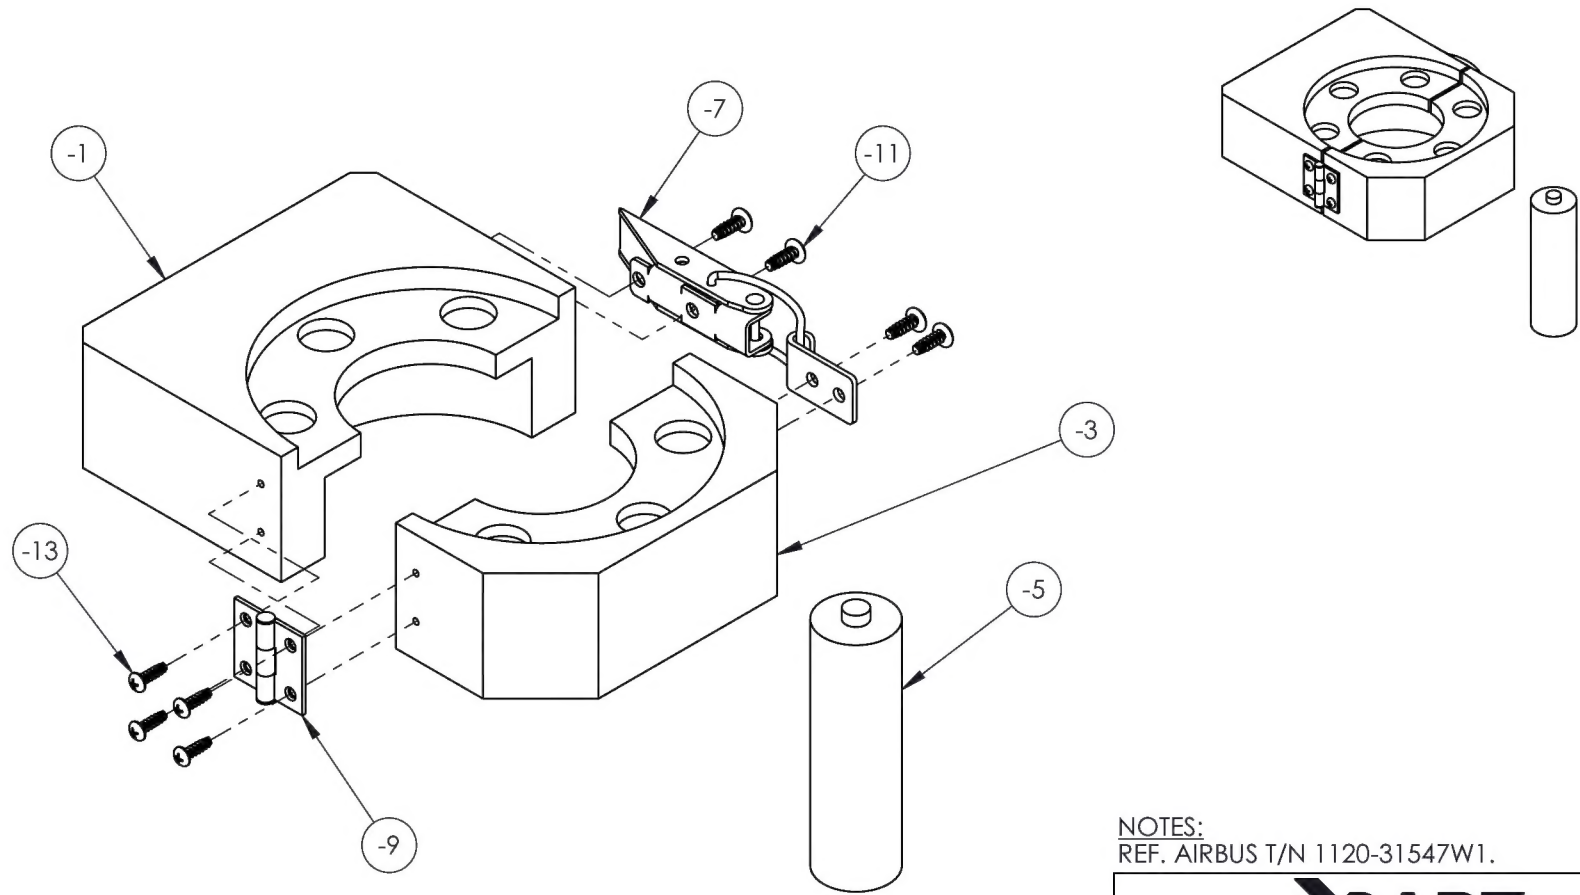


NOTES:
REF. AIRBUS T/N 1120-31547W1.

DART AEROSPACE																									
TITLE PRESSING IN TOOL																									
DWG NO. RBE1120-31547W1	REV 1																								
<table border="1"> <tr> <td>MAT'L</td> <td>UNLESS OTHERWISE SPECIFIED</td> </tr> <tr> <td>HEAT TREAT</td> <td>DIMENSIONS ARE IN INCHES</td> </tr> <tr> <td>FINISH</td> <td>.XXX ± .005 FRACTIONS ± 1/8</td> </tr> <tr> <td></td> <td>.XX ± .01 ANGLES ± .5°</td> </tr> <tr> <td></td> <td>.X ± .1 SURFACES = 125</td> </tr> <tr> <td>SPEC</td> <td>1. BREAK ALL SHARP EDGES .015 x 45° OR .015R</td> </tr> <tr> <td>DRAWN BY: MACKOVJAK</td> <td>2. DIMENSIONAL LIMITS APPLY AFTER PLATING</td> </tr> <tr> <td>CHECKED: CLOUGH</td> <td>3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009</td> </tr> <tr> <td>OPPS APPR: ANDERSON</td> <td>USED ON MODEL</td> </tr> <tr> <td>QA APPR: LINDSAY</td> <td>H145</td> </tr> <tr> <td>APPROVED: GILBERT</td> <td></td> </tr> <tr> <td>SCALE 1:2</td> <td>DATE 7/19/2016</td> </tr> </table>		MAT'L	UNLESS OTHERWISE SPECIFIED	HEAT TREAT	DIMENSIONS ARE IN INCHES	FINISH	.XXX ± .005 FRACTIONS ± 1/8		.XX ± .01 ANGLES ± .5°		.X ± .1 SURFACES = 125	SPEC	1. BREAK ALL SHARP EDGES .015 x 45° OR .015R	DRAWN BY: MACKOVJAK	2. DIMENSIONAL LIMITS APPLY AFTER PLATING	CHECKED: CLOUGH	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009	OPPS APPR: ANDERSON	USED ON MODEL	QA APPR: LINDSAY	H145	APPROVED: GILBERT		SCALE 1:2	DATE 7/19/2016
MAT'L	UNLESS OTHERWISE SPECIFIED																								
HEAT TREAT	DIMENSIONS ARE IN INCHES																								
FINISH	.XXX ± .005 FRACTIONS ± 1/8																								
	.XX ± .01 ANGLES ± .5°																								
	.X ± .1 SURFACES = 125																								
SPEC	1. BREAK ALL SHARP EDGES .015 x 45° OR .015R																								
DRAWN BY: MACKOVJAK	2. DIMENSIONAL LIMITS APPLY AFTER PLATING																								
CHECKED: CLOUGH	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009																								
OPPS APPR: ANDERSON	USED ON MODEL																								
QA APPR: LINDSAY	H145																								
APPROVED: GILBERT																									
SCALE 1:2	DATE 7/19/2016																								

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS	PG.
			-1	1	BLOCK 1	BLACK DELRIN/ACETAL		2
			-3	1	BLOCK 2	BLACK DELRIN/ACETAL		3
			-5	1	SHAFT	BLACK DELRIN/ACETAL		4
		B/O	-7	1	LATCH	S.S.	MCMaster-CARR # 1889A37	1
		B/O	-9	1	HINGE	STEEL	MCMaster-CARR # 1598A52	1
		B/O	-11	4	THREAD FORMING SCREW	S.S.	6-19 X 3/8" (MCMaster-CARR # 99461A230)	1
		B/O	-13	4	THREAD FORMING SCREW	S.S.	4-20 X 3/8" (MCMaster-CARR # 99461A284)	1

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS						
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED	


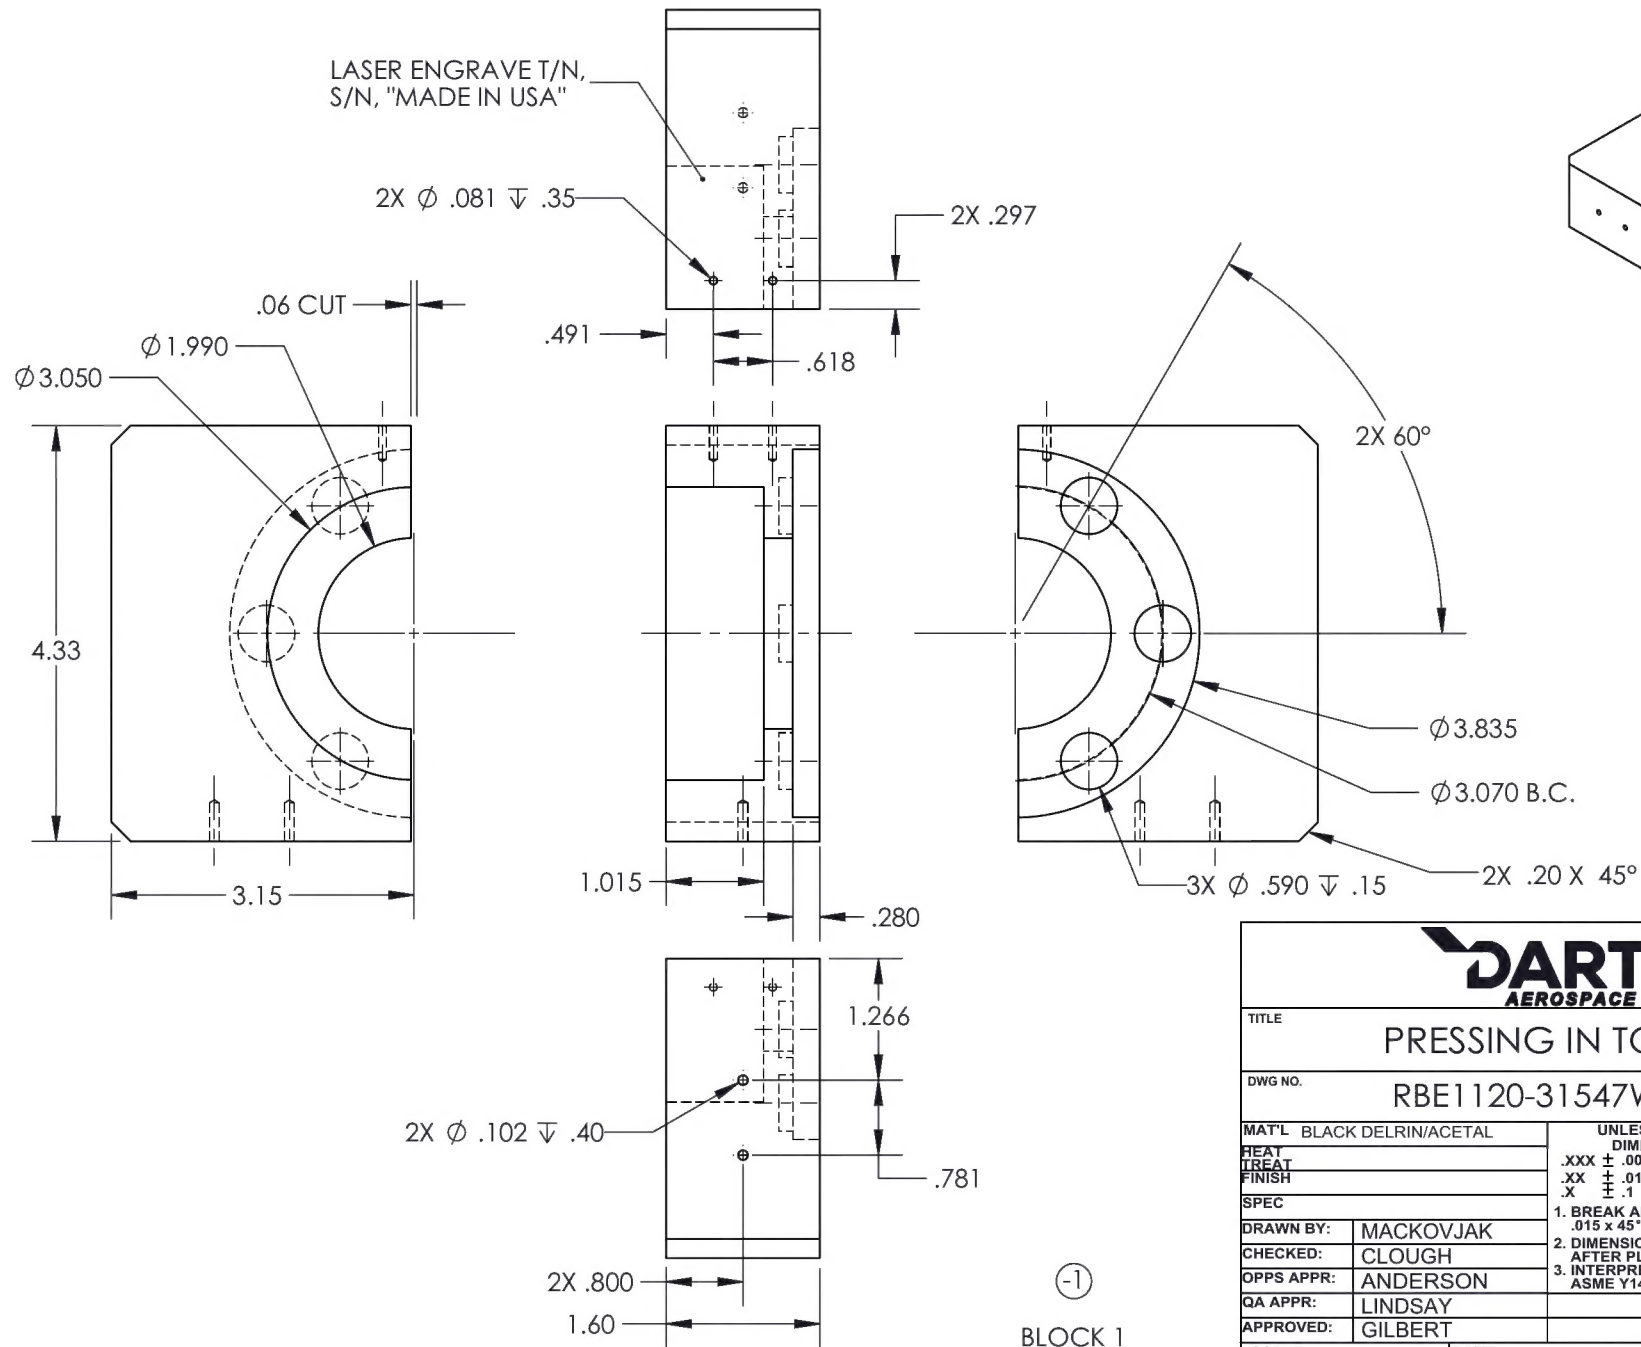


(1)
BLOCK 1

DART AEROSPACE	
TITLE PRESSING IN TOOL	
DWG NO. RBE1120-31547W1-1	REV 1
MAT'L BLACK DELRIN/ACETAL HEAT TREAT FINISH SPEC	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .XXX ± .005 FRACTIONS ± 1/8 .XX ± .01 ANGLES ± 5° .X ± .1 SURFACES = 125° ✓	
1. BREAK ALL SHARP EDGES .015 x 45° OR .015R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING 3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009	
DRAWN BY: MACKOVJAK	USED ON MODEL
CHECKED: CLOUGH	H145
OPPS APPR: ANDERSON	
QA APPR: LINDSAY	
APPROVED: GILBERT	
SCALE 1:2	DATE 7/19/2016
SHEET 2 OF 4	

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS				
REV	ECR	DESCRIPTION	DATE	INITIAL
				APPROVED

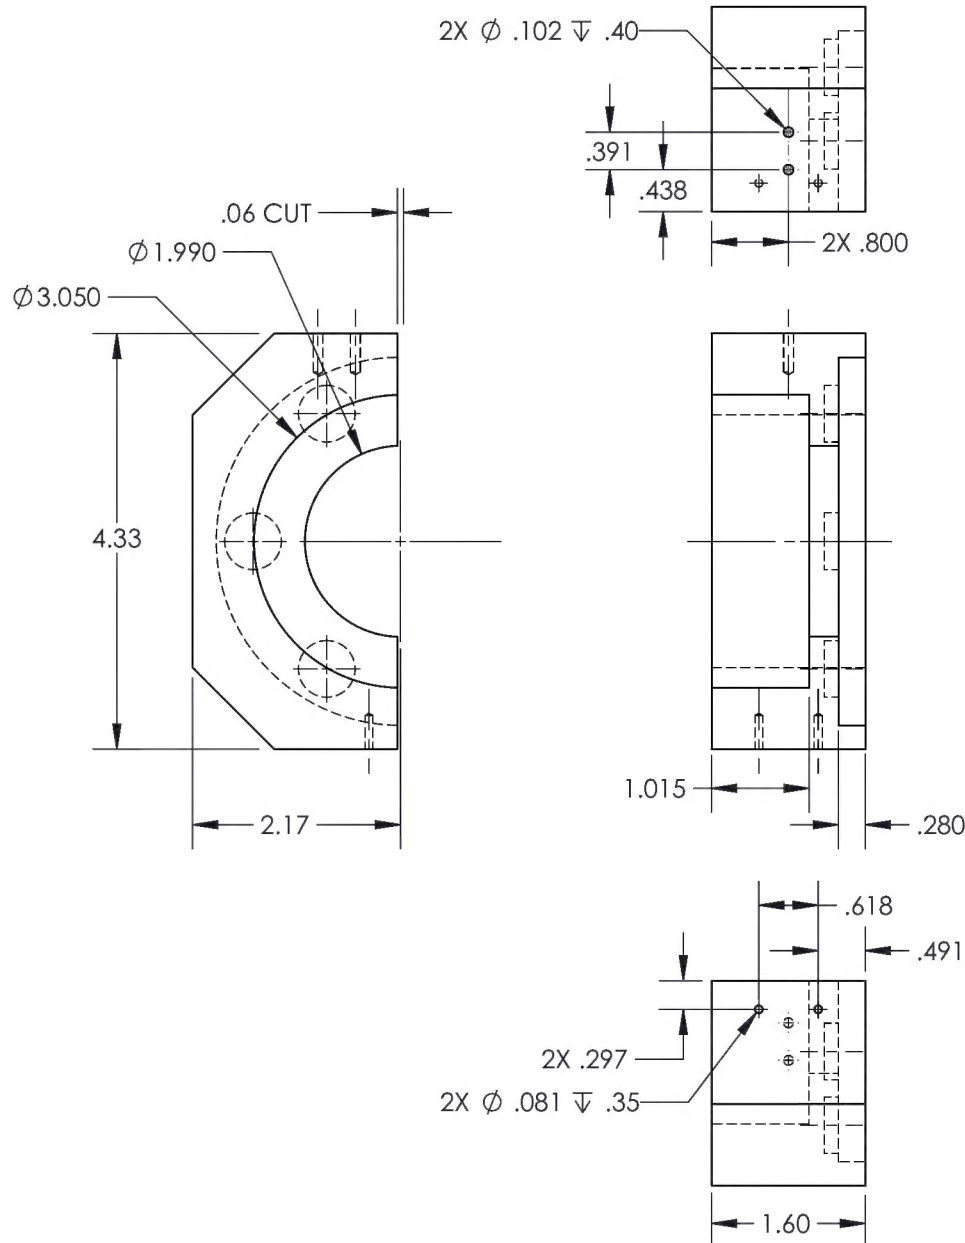



(-3)
BLOCK 2

DART AEROSPACE	
TITLE PRESSING IN TOOL	
DWG NO. RBE1120-31547W1-3	REV 1
MAT'L BLACK DELRIN/ACETAL UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .XXX ± .005 FRACTIONS ± 1/8 .XX ± .01 ANGLES ± .5° .X ± .1 SURFACES = 125/✓	
SPEC	
1. BREAK ALL SHARP EDGES .015 x 45° OR .015R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING 3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009	
DRAWN BY:	MACKOVJAK
CHECKED:	CLOUGH
OPPS APPR:	ANDERSON
QA APPR:	LINDSAY
APPROVED:	GILBERT
USED ON MODEL H145	
SCALE 1:2	DATE 7/19/2016
SHEET 3 OF 4	

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS				
REV	ECR	DESCRIPTION	DATE	INITIAL
				APPROVED

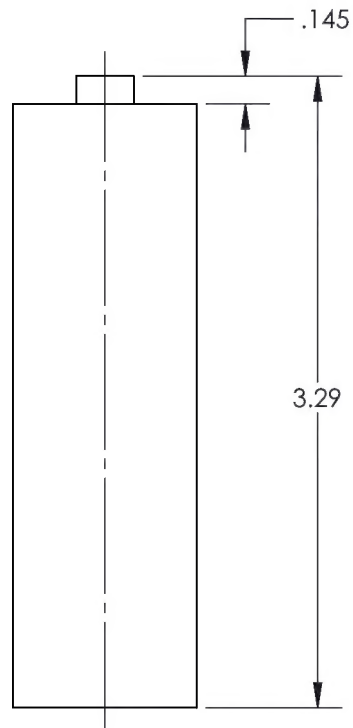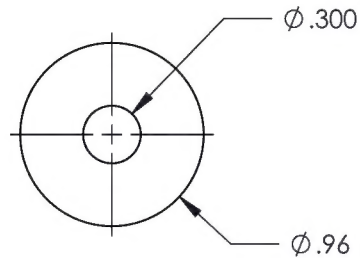

(-5)

SHAFT

DART AEROSPACE	
TITLE PRESSING IN TOOL	
DWG NO. RBE1120-31547W1-5	REV 1
MAT'L BLACK DELRIN/ACETAL	UNLESS OTHERWISE SPECIFIED
HEAT TREAT	DIMENSIONS ARE IN INCHES
FINISH	.XXX \pm .005 FRACTIONS \pm 1/8
SPEC	.XX \pm .01 ANGLES \pm .5°
	.X \pm .1 SURFACES = 125°
DRAWN BY: MACKOVJAK	1. BREAK ALL SHARP EDGES
CHECKED: CLOUGH	.015 x 45° OR .015R
OPPS APPR: ANDERSON	2. DIMENSIONAL LIMITS APPLY
QA APPR: LINDSAY	AFTER PLATING
APPROVED: GILBERT	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009
SCALE 1:1	DATE 7/19/2016
	SHEET 4 OF 4